

# 1,200-lb Single-Door Electromagnetic Locks

**E-941SB-1200** Black, UL Listed

**E-941SB-1K2PQ** Black, with Bond Sensor and Status LED, UL listed

## Features

- Multiple UL listings (see chart below)
- 12/24VDC Selectable
- MOV Surge protection
- Anodized aluminum housing with black finish\*
- Adjustable mounting bracket
- Complete mounting hardware for typical installations
- L-bracket and Z-brackets available for easy mounting
- Detachable faceplate
- Lifetime limited warranty



E-941SB-1200 shown




## E-941SB-1K2PQ

- Built-in dual-colored status LED and bond sensor to indicate locking status

|              |                                  |
|--------------|----------------------------------|
| <b>Green</b> | Door is closed and locked        |
| <b>Red</b>   | Door is not closed and/or locked |
| <b>Off</b>   | Door in use / no power           |

- Bond sensor relay rated 1A@30VDC



## Specifications

| Model                        | 1200                   | 1K2PQ         |
|------------------------------|------------------------|---------------|
| <b>Holding force</b>         | 1,200-lb (545kg)       |               |
| <b>Operating voltage</b>     | 12/24 VDC (selectable) |               |
| <b>Current draw</b>          | 500mA@12VDC            |               |
| <b>12VDC</b>                 |                        |               |
| <b>24VDC</b>                 | 250mA@24VDC            | 270mA@24VDC   |
| <b>Operating temperature</b> | 32°~120° F (0°~49° C)  |               |
| <b>Weight</b>                | 11-lb (5kg)            |               |
| <b>Bond sensor relay</b>     | No                     | SPDT 1A@30VDC |
| <b>Status LED</b>            | No                     | Yes           |

## UL Listings

| UL Designation  |                                  | Country | 1200 | 1K2PQ |
|-----------------|----------------------------------|---------|------|-------|
| <b>UL294</b>    | Access Control System Units      | USA     | ✓    | ✓     |
| <b>UL1034</b>   | Burglary Resistant Electric Lock | USA     | ✓    |       |
| <b>UL864</b>    | Fire Alarm Systems               | USA     | ✓    |       |
| <b>UL10C</b>    | Positive Pressure Fire Test      | USA     | ✓    | ✓     |
| <b>UL10B</b>    | Fire Test of Door Assemblies     | USA     | ✓    | ✓     |
| <b>ULC-S104</b> | Fire Test of Door Assemblies     | Canada  | ✓    | ✓     |

\*E-941SB-1200 and E-941SB-1K2PQ are also available with aluminum (US 28) finish (E-941SA-1200 and E-941SA-1K2PQ respectively). Contact SECO-LARM or visit [www.seco-larm.com](http://www.seco-larm.com) for details.

## SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)




Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.


SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

**Dimensions**

Electromagnet

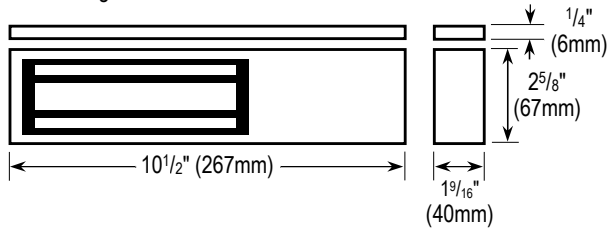

Armature Plate

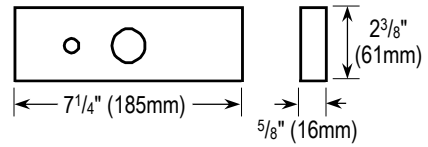

**Optional Accessories**

For 1,200-lb Black Single-Door Electromagnetic Locks

Z-Bracket



E-941S-1K2B/ZQ

L-Bracket



E-941S-1K2B/LQ

U-Bracket (for Glass Doors)



E-941S-1K2/UQ

Header Plate / Plate Spacer



E-941S-1K2B/HP

Armature Plate Holder



E-941S-1K2/HQ

1/2" Filler Plate



E-941S-1K2/F43Q

5/8" Filler Plate



E-941S-1K2/F53Q