

Wired Single-Channel RF Transmitters

SK-919T1-GBWQ 315MHz, FCC

SK-939T1-GBWQ 433.92MHz, CE

Features

- Powered by internal battery or external 3~13 VDC output regulated adapter (not included)
- Frequency – 315MHz (FCC) / 433.92MHz (CE)
- Operates up to 500ft (150m)*
- Over 68 billion (6.8x10¹⁰) possible codes
- LED transmission indicator
- Includes one 3VDC lithium battery (CR-2032)
- Compact size
- Compatible with all ENFORCER SK-series receivers of the same frequency
- Also available without logo



SK-919T1-GBWQ shown

Compatible Receivers



Relay Output
1-Channel (shown)

2-Channels



Relay Output
3-Channels
(315MHz only)

4-Channels (shown)



Miniature (315MHz only)
Relay Output
1-Channel (shown)

Transistor Ground Output
1- and 2- Channels


Specifications

Model	SK-919T1-GBWQ	SK-939T1-GBWQ
Type	1-Channel wired RF transmitter	
Wiring	Switch	Two 6" wires for N.O.
	Power	Two 6" wires for power input
Power	Battery	3VDC Battery (CR-2032, included)
	External	3~13 VDC Output regulated adapter (not included)
RF Frequency	315MHz (FCC)	433.92MHz (CE)
Number of buttons	1	
Channels	1	
Possible codes	Over 68 billion (6.8x10 ¹⁰)	
Dimensions	1 1/4"x2 3/16"x5/16" (31.5x55x8 mm)	


*Actual range will vary depending on the installation and operating environment.

Sample Applications


Make any push-to-exit plate wireless

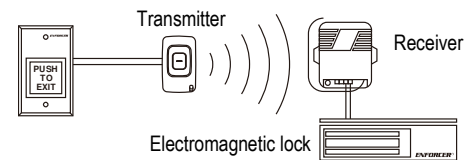


Convert photobeam sensors with dry contacts into an entry alert

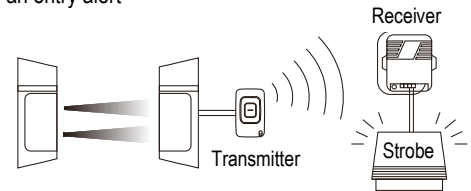

Wireless equipment / perimeter security

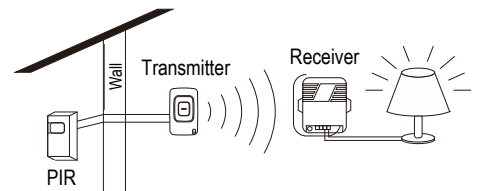

Wireless doorbell / service call button

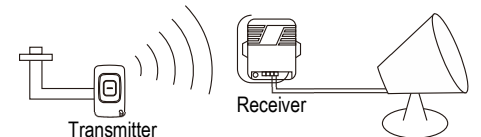

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SK-9x9T1-GBWQ_210723.docx