

# 50ft Reflective Photoelectric Beam Sensor

## **E-931-S50RRQ**


**Range: Up to 50ft (15m)**

### Features:

- Up to 50ft (15m) range
- For outdoor gates, garage doors, etc.
- Weatherproof (IP66) construction for indoor/outdoor use
- Anti-condensation case
- Dual-color LED alignment system
- Form C relay
- Tamper switch: N.C. 500mA@30VDC
- 3 1/8" (82mm) Round reflector included
- Compact size



### Dimensions:

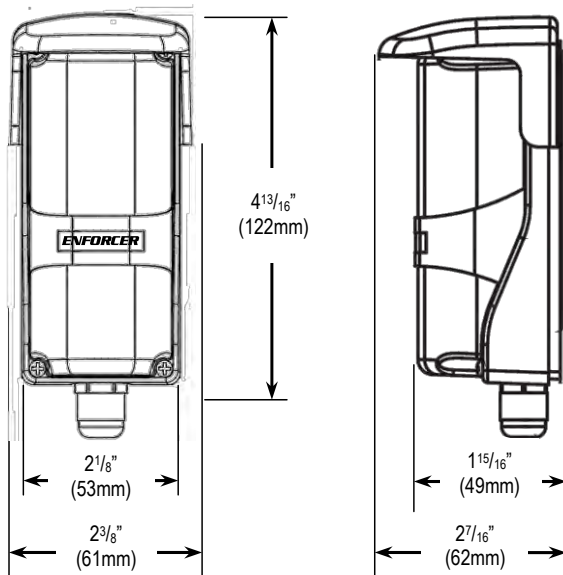

### Specifications:

| Model               |       | E-931-S50RRQ                         |
|---------------------|-------|--------------------------------------|
| Type                |       | Reflective Photoelectric Beam Sensor |
| Sensing range       |       | 50ft (15m)                           |
| Operating voltage   |       | 12~250 VAC/VDC                       |
| Current Draw        | 12VDC | Standby: 20mA; Active: 40mA          |
|                     | 24VDC | Standby: 10mA; Active: 20mA          |
| Response time       |       | 10ms                                 |
| Light source        |       | IR LED                               |
| LEDs                | Red   | Beam broken                          |
|                     | Green | Beam aligned                         |
| Trigger output      |       | SPDT relay output                    |
| Switching capacity  |       | 0.5A/120VAC (1A/30VDC)               |
| IP Rating           |       | IP66                                 |
| Storage temperature |       | -31°~176° F (-25°~60° C)             |

## SECO-LARM®

16842 Millikan Ave • Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2012 © SECO-LARM U.S.A., Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI

pi-E-931-S50RRQ\_v2.docx