

Elbow RTE Push Plate

SD-7098-SKDQ

The ENFORCER Elbow RTE Push Plate features a large button for easy, hands-free operation, a red and green LED status indicator, and two stainless steel faceplates. With an expected operating life of over 100,000 cycles and flexible mounting options, the ENFORCER Elbow RTE Push Plate provides reliable, secure, and accessible entry and exit for schools, hospitals, nursing homes, apartments, and other high-density public spaces.

Features:

- Oversized plate for increased visibility and ease of use even when hands are not free
- Low-profile design – only 7/8" (22mm) thick
- Dual-colored LED indicates status (red – standby, green – triggered)
- Outputs rated 1A@30VDC, 0.5A@125VAC
- Operating life: Over 100,000 cycles (factory tested)
- Operating voltage – 12/24VDC
- 2 Faceplates included (for right- or left-handed installation)
- Momentary SPDT switch



100,000 Cycles

12/24 VDC


ABS Plastic

Easy Installation

Specifications:

Operating voltage		12/24 VDC
Current draw	Standby	24mA@12VDC, 25mA@24VDC
	Active	45mA@12VDC, 47mA@24VDC
Contact rating	Output 1	1A@30VDC, 0.5A@125VAC
	Output 2	1A@30VDC, 0.5A@125VAC
Switch type		Momentary NO/NC/COM (SPDT)
Contact resistance		50mΩ Max.(initial)
LED Status indicator		Dual-colored (red – standby, green – triggered)
Operating life		100,000 Cycles (factory tested)
Material	Faceplate	ABS Plastic with stainless steel insert
	Switch box	ABS Plastic
Dimensions		9 ¹³ / ₁₆ "x3 ³ / ₄ "x7 ⁷ / ₈ " (250x95x22 mm)
Operating humidity		0~95% Non-condensing
Operating temperature		14°~113° F (-10°~45° C)
Weight		10.2-oz (289g)

Dimensions:

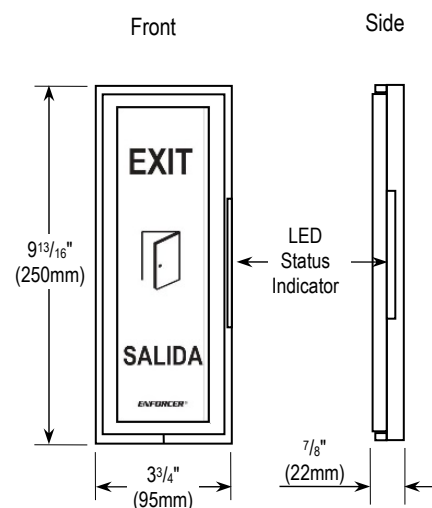

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2018 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SD-7098-SKDQ_180629.docx