

### Electric Door Strike

**SK-990AQ** Fail-secure (door unlocked with power)

**SK-990BQ** Fail-safe (door locked with power)

The **SECO-LARM®** Electric Door Strike can be used to convert cylindrical lock sets into an electronic access-controlled locking system. Combine with an optional digital keypad such as the **SECO-LARM® SK-1011-SDQ** for keyless high-security.

#### Features:


- Converts cylindrical lock sets into an electronic access-controlled locking system
- Can be used on virtually any cylindrical door locking system
- Easily connects to **SECO-LARM®** electronic keypads such as **SK-1011-SDQ** or **SK-1311-SPQ** models
- Baked painted finish
- Use fail-secure (**SK-990AQ**) units for entrance door installations
- Use fail-safe (**SK-990BQ**) units for emergency door and escape door installations

#### Specifications:

Model	SK-990AQ	SK-990BQ
Type	Fail-secure	Fail-safe
Circuit type	N.O.	N.C.
Input voltage	10~14VDC	
Current draw	450mA	200mA
Coil resistance	26Ω	60Ω
Polarity	None	
Weight	350g	



#### Dimensions:

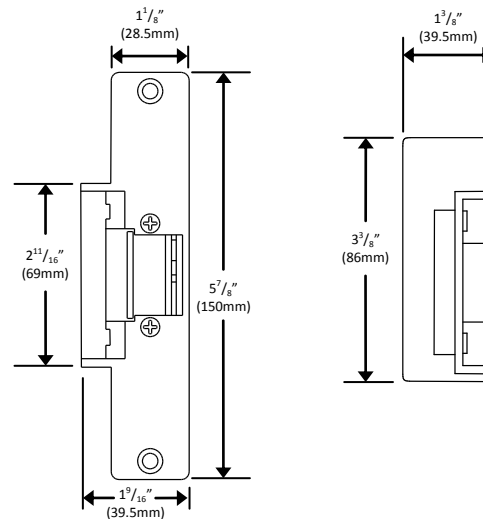

#### Also Available from **SECO-LARM®**:

Stand-Alone Keypad with Proximity Reader



SK-1131-SPQ

Stand-Alone Keypad



SK-1011-SDQ

Electromagnetic Lock



E-941SA-1200

Request-to-Exit Plate



SD-7202GC-PEQ

Access Control Power Supply



EAP-5D1Q

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Tel (CA & Int'l): (949) 261-2999 | (800) 662-0800

Website: [www.seco-larm.com](http://www.seco-larm.com) | Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright 2016 © SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®**

PL\_SK-990xQ\_160204.docx