

HDMI Surge Protector

VS-1AHHAQ

The ENFORCER HDMI Surge Protector is a passive device that helps protect sensitive HDMI equipment from power surges. The device can be deployed in new installations or existing ones.

For the best protection, installing two surge protectors is recommended: one at each end of the cable.

Features:


- Helps prevent damage to sensitive HDMI equipment such as players, monitors, and projectors
- Intercepts repeated surges and spikes that could damage HDMI A/V equipment
- Built in ESD, EFT
- Reaction Speed <1ns
- Passive operation – no external power required
- Includes a 12" (30cm) grounding wire for convenient connection to ground

Specifications:

ESD Protection		15kV (ESD), 8kV (contact)
EFT Protection		40A (5/50ns)
Surge Protection		5A (8/20ns)
Surge reaction speed		<1ns
Connector	In	HDMI
	Out	HDMI
Dimensions		2 3/16" x 1" x 1" (56x26x26mm)
Weight		1.2-oz (35g)
Material		Aluminum
Operating Temperature		32°-131°F (0°-55°C)



Overview:

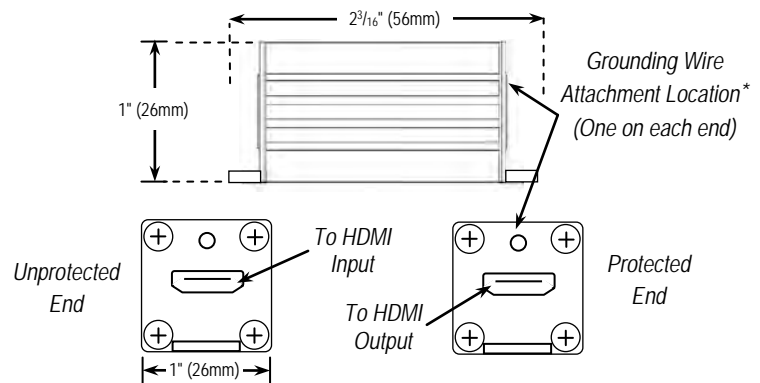

* Note: There is a 'Grounding Wire Attachment Location' included on both ends of the HDMI Surge Protector. Grounding wire can be attached to either of these locations.

Also Available from SECO-LARM®:



IPV-PD88Q
IP Surge Protector



VS-1V22AQ
HD-SDI Surge Protector



VS-1V12BQ
Video Surge Protector



IPV-P188Q
PoE Surge Protector

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

VS-1AHHAQ_PI_040315.docx