IP / Ethernet Extenders

IPB-A1100Q *IP / Ethernet Extender over Cat5e/6*
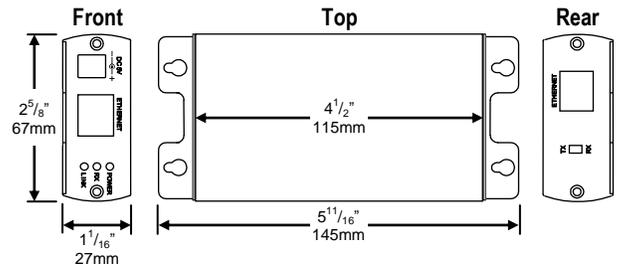**IPB-A1200Q** *IP / Ethernet Extender over Coax*

Features:

▶ Extends the range of IP cameras or any TCP/IP device beyond the 300ft (100m) limit of Ethernet

▶ Range:
IPB-A1100Q—Up to 3,900ft (1,200m)
IPB-A1200Q—Up to 5,900ft (1,800m)

▶ Ethernet speed: 10/100Base-T

▶ Does not filter out any protocols, codes, or applications, ensuring compatibility with most IP cameras

▶ Easy setup and installation

▶ Status LEDs show power status, link status, and if the unit is set as a receiver

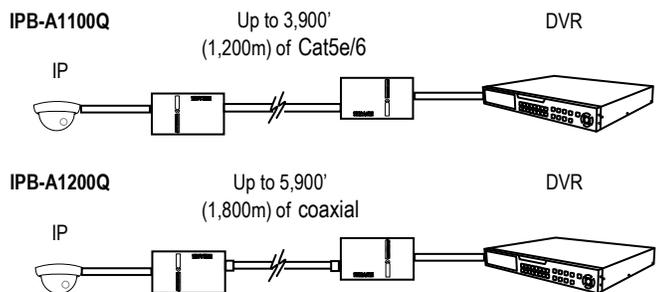▶ Each kit includes one transmitter, one receiver, and two power adapters

IPB-A1100Q

IPB-A1200Q

Specifications:

Model	IPB-A1100Q	IPB-A1200Q
Range	3,900' (1,200m)	5,900' (1,800m)
Input connector	RJ-45	
Output connector	RJ-45	BNC
Operating voltage	5VDC (adapter included)	
Current draw (power supply)	750mA	
Link cable	Cat5 or better Cat6 recommended	RG59/U or better RG6/U recommended
Cat5e/6 cable	TIA/EIA—568-B	
Ethernet speed	10/100Mbps	

Dimensions:

Front — $2^5/_8$" 67mm, $1^1/_{16}$" 27mm

Top — $4^1/_2$" 115mm, $5^{11}/_{16}$" 145mm

Rear

Sample Application:

IPB-A1100Q — IP — Up to 3,900' (1,200m) of Cat5e/6 — DVR

IPB-A1200Q — IP — Up to 5,900' (1,800m) of coaxial — DVR

PiIPB-A1x00Q.docx