

Electric Glass Door Strikes

SD-996A-D3Q Fail-secure, 12 or 24 VDC

SD-996B-D3Q Fail-safe, 12 or 24 VDC

The SECO-LARM Electric Glass Door Strikes can be installed on frameless glass doors to provide electronic access-controlled locking system. The strikes can be used on 3/8" (10mm) or 1/2" (12mm) glass doors, are non-handed, and are available in either fail-safe or fail-secure models.

Combine with an optional SECO-LARM digital keypad for keyless high security.



Features

- Easy installation on top or side of door
- Reversible, non-handed design
- Horizontal faceplate adjustment to help overcome misalignment
- Suitable for office-type applications
- Available in fail-secure or fail-safe
- Non-polarized connection
- For use on 3/8" (10mm) or 1/2" (12mm) thick frameless glass doors
- Combine with an optional digital keypad

Horizontal Adjustment

Non-handed Design

12/24 VDC Operation

10/12 mm Thick Glass

Specifications:

Model	SD-996A-D3Q	SD-996B-D3Q
Operating voltage	12 or 24 VDC	
Current draw	12VDC	500mA
	24VDC	250mA
Lock mode	Fail-secure	Fail-safe
Latch throw	3/16" (5mm) Max., 1/16" (2mm) Min.	
Operating humidity	0~85% Non-condensing	
Operating temperature	14°~120° F (-10°~49° C)	
Dimensions	1"x6 ⁵ / ₁₆ "x1 ³ / ₁₆ " (25x160x30 mm)	

Note: This strike is not weatherproof and should only be installed indoors.


SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Overview:

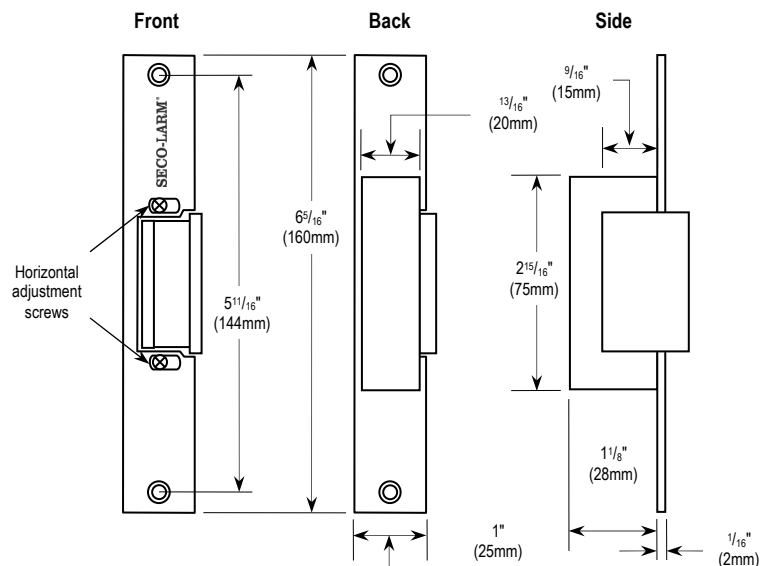

Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®