Access

Surface-Mount Electric Rim Strikes

3/4" Housing Thickness SD-998C-NUQ SD-998C-NUAQ 1/2 " Housing Thickness

The SECO-LARM SD-998C-NUQ and SD-998C-NUAQ Surface-Mount Electric Rim Strikes are designed for rim exit devices with a throw Pullman latchbolt. The strike features selectable fail-safe/fail-secure operation, 12/24 VDC operating voltage, horizontal adjustment, and a thick surface-mount metal housing which eliminates frame cutting when installing.



- 12/24 VDC Operating voltage
- Horizontal adjustment
- Thick metal housing
- Accommodates up to 3/4" Pullman latch
- Reversible non-handed design fits most door frames
- Surface-mount installation on metal or wooden door frames
- Works with standard rim-type exit devices including SECO-LARM SD-962AR-36A, SD-962AR-36G
- Static strength: 1,500-lb (680kg)
- Tested for 250,000 cycles (UL Tested)
- Low current draw: 540mA@12VDC, 270mA@ 24VDC
- Dynamic strength: 70 lb-ft (9.68 kg-m)
- Field-selectable for fail-safe or fail-secure operation
- Spacers included:
 - 3x ¹/₃₂" (0.9mm) (SD-998C-NUQ)
 - 1x ¹/₁₆", 2x ¹/₈" (1.5mm, 3mm) (SD-998C-NUAQ)
- Five-year limited warranty

Specifications:

Model	SD-998C-NUQ	SD-998C-NUAQ
Operating voltage	12/24 VDC	
Current draw	540mA@12VDC, 270mA@24VDC	
Operating temperature	14°~120° F (-10°~49° C)	
Operating humidity	0~85%	
Maximum latch throw	3/4" (19mm)	¹ / ₂ " (13mm)
Static strength	1,500 lb (680kg)	
Dynamic strength	70 lb-ft (9.68 kg-m)	
Endurance	250,000 cycles (UL Tested)	
Dimensions	8"x1 ³ / ₄ "x ³ / ₄ " (203x45x19 mm)	8"x1 ³ / ₄ "x ¹ / ₂ " (203x45x13 mm)














Overview:

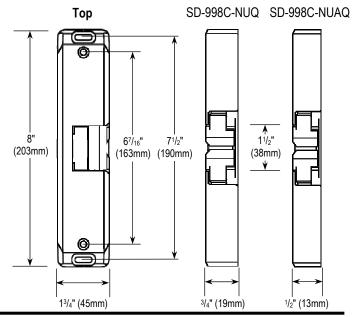



Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



