

Outdoor Wave-to-Open Sensors

SD-9163-KSQ Slimline, English*

SD-9163-KSVQ Slimline, English,* Manual Override

SD-9263-KSQ Single-Gang, English*, ETL UL294 Listed

SD-9263-KSVQ Single-Gang, English,* Manual Override

The ENFORCER Outdoor Wave-to-Open Sensor is a full-featured exit plate which uses IR technology to allow egress from a protected area or activate a device with the simple wave of a hand. Since no touch is required, this sensor is suitable for use in hospitals, clinics, labs, cleanrooms (to reduce the risk of contamination), schools, factories, or offices.







SD-9163-KSVQ

Features

- Weather-resistant (IP65) for outdoor use[†]
- Clean and simple no-touch operation reduces the risk of cross-contamination
- Adjustable sensor range up to 7" (18cm)
- Stainless steel plate, available in slimline or single-gang
- 1.2A relay, adjustable trigger duration 0.5~30 seconds
- Selectable LED colors (turns from red to green or green to red) to show if the sensor is activated

SD-9163-KSVQ and SD-9263-KSVQ only

 Manual override button functions without electricity in case of power failure



SD-9263-KSQ



SD-9263-KSVQ


Specifications

Model	SD-9163-KSQ SD-9263-KSQ SD-9163-KSVQ SD-9263-KSVQ		
Operating voltage	12~24 VDC		
Current draw Standby (12/24 VDC)	13mA / 15mA		
(max. ±10%) Triggered (12/24 VDC)	23mA / 28mA 28mA / 35mA		
Relay type	Form C dry contact, 1.2A@24VDC		
Response time	10mS		
Output time	0.5~30s, toggle		
Range	2"~7' (5~18cm)		
IP Rating	IP65†		
Operating temperature	-4°~131° F (-20°~55° C)		
Dimensions	1 ¹ / ₂ "x4 ¹ / ₂ "x1 ¹ / ₂ " 2 ³ / ₄ "x4 ¹ / ₂ "x1 ¹ / ₂ " (39x115x39 mm) (70x115x39 mm)		

^{*}Also available with Spanish or French faceplates

†When properly installed

Sample Installation

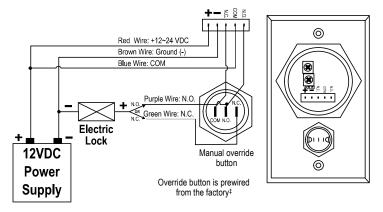

‡SD-9163-KSVQ and SD 9263-KSVQ only

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

Copyright © 2022 SECO-LARM U.S.A, Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

(€ R#B

Ordering Information

Outdoor Wave-to-Open Sensors*						
Model	SD-9163-KSQ	SD-9263-KSQ	SD-9163-KS1Q	SD-9263-KS1Q	SD-9163-KS2Q	SD-9263-KS2Q
Language	English		Spanish		French	
Photo	WAVE TO OPEN	WAVE TO OPEN	ENFORCER* ABRIR SIN CONTACTO ((\(\subseteq \)))	ABRIR SIN CONTACTO	ENFORCER OUVRIR SANS CONTACT ((**))	OUVRIR SANS CONTACT

^{*}Also available with European faceplate in English, Spanish, and French models

Outdoor Wave-to-Open Sensors with Override Button					
Model	SD-9163-KSVQ	SD-9263-KSVQ	SD-9463-KSVQ		
Language	English [†]				
Photo	ENFORCER WAVE TO OPEN ((W)) Manual Overnos	MAVE TO OPEN @ ENFERREMENT	WAVE TO OPEN Manual Override		

[†]Spanish and French faceplates available by special order

Outdoor Wave-to-Open Sensors – Other Models			Other Medale	
Model	SD-9963-KSGQ	SD-9773-KNEVQ	Other Models	
Туре	Post-Mount	Surface-Mount	Also Available	
Photo	WAVE TO OPEN Manual Orter da Acroneza	WAVE TO OPEN Whole Control	For our full line of OEM/private label infrared sensors, contact SECO-LARM	