

## 3/8" Concealed-Mount Contacts

### SM-207Q/W

1" (25mm) Gap, Closed Loop, Wire Leads, White

### SM-207Q/BR

1" (25mm) Gap, Closed Loop, Wire Leads, Brown

### Features

- Used for protecting sliding doors and windows where space is limited
- 3/8" (10mm) Press-fit mount
- 15" (38cm) Wire leads
- Contact reed switch is SPST, deactivated rhodium on gold under-plating for a longer expected life
- Unique glue/epoxy compound protects reed switch
- For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty




SM-207Q/BR shown



### Specifications

Model		SM-207Q/W	SM-207Q/BR
Loop type		Closed loop	
Electrical configuration		N.O. (SPST)	
Operation gap		1" (25mm)	
Connectors		15" (38cm) Leads	
Color		White	Brown
Material	Case	High-impact ABS plastic / epoxy compound	
	Contact	Deactivated rhodium on gold under-plating	
Contact rating		1.0A@10VDC (max.) 10W (max.)	
Operating temperature		-15°~160° F (-25°~70° C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Switch dimensions		1 3/8" x ø 7/16" (35xø11 mm)	
Magnet dimensions		1 3/8" x ø 7/16" (35xø11 mm)	
Magnet		Alnico 5	

### Dimensions

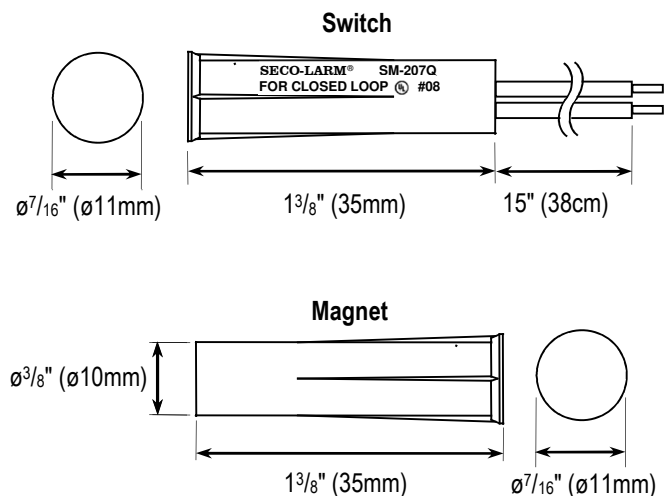

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL\_SM-207Q\_210421.docx

## 3/8" Oculta Montaje Contactos Magneticos

**SM-207Q/W** 1" (25mm) Brecha, Lazo cerrado,  
Cables Conductores, Blanco


**SM-207Q/BR** 1" (25mm) Brecha, Lazo cerrado,  
Cables Conductores, Café

### Características

- Se utiliza para proteger puertas corredizas y ventanas donde el espacio es limitado
- 3/8" (10mm) Montaje a presión
- 15" (38cm) cables conductores
- El interruptor de lengüeta de contacto es SPST, rodio desactivado en chapado de oro para una vida útil más larga
- El compuesto único de pegamento/epoxi protege el interruptor de lamina
- Para circuitos cerrados
- 1" (25mm) Brecha
- Garantía limitada de por vida




SM-207Q/BR mostrado



### Especificaciones

Modelo	SM-207Q/W	SM-207Q/BR
Tipo de circuito	Lazo cerrado	
Configuración eléctrica	N.A. (SPST)	
Brecha de operación	1" (25mm)	
Conectores	15" (38cm) Cables conductores	
Color	Blanco	Café
Material	Caja	Plástico ABS de alto impacto / compuesto epoxi
	Contactos	Rodio desactivado en chapado de oro
Puntuación de contactos	1.0A@10VDC (max.)	
	10W (max.)	
Temperatura	-15°~160° F (-25°~70° C)	
Ciclos de conmutación	50 Million (0.1mA@5VDC)	
Dimensiones	Interruptor	1 3/8" x ø 7/16" (35xø11 mm)
	Imán	1 3/8" x ø 7/16" (35xø11 mm)
Tipo de imán	Alnico 5	

### Dimensiones

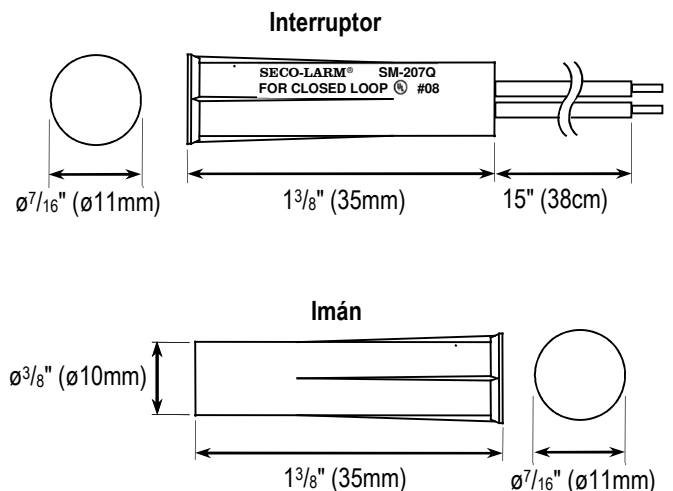

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Webseite: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL\_SM-207Q\_210421.docx