

## 3/8" Screw-Terminal Recessed-Mount Contact

### SM-4102-TQ/W

1" (25mm) Gap, Closed Loop, Screw Terminals, White

#### Features:


- Used for protecting sliding doors and windows where space is limited
- 3/8" (10mm) Press-fit mount
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- High-impact ABS plastic
- Miniature size for easier concealment
- Switch and magnet have ribs for securing in holes
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty



#### Specifications:

Loop type	Closed loop	
Electrical configuration	N.O. (SPST)	
Operation gap	1" (25mm)	
Color	White	
Material	Case	High-impact ABS plastic
	Connectors	Gold-plated terminals
Contacts	Iridium-plated	
Contact rating	0.1A@100VDC (max.)	
	1.0A@10VDC (max.)	
	10W (max.)	
Operating temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	1 1/8" x 7/16" (28x11 mm)	
Magnet dimensions	3/4" x 7/16" (19x 11 mm)	
Magnet	Rare-earth neodymium	

#### Dimensions:

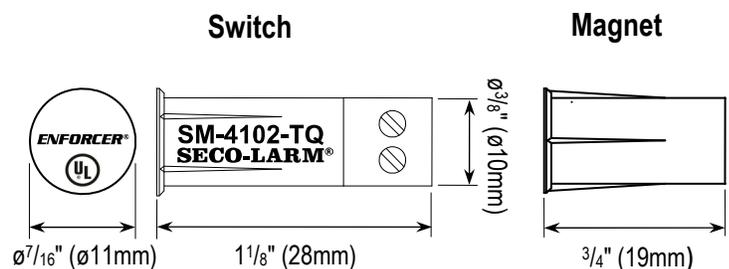

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

