

# **Plunger-Type Recessed-Mount Contact**

### SM-4301-TQ/W

Push-button, Closed Loop, Screw Terminals, White

#### **Features:**

- Used for protecting sliding doors and windows where space is limited
- · Magnet and reed switch contained in housing
- Plunger travel is <sup>1</sup>/<sub>4</sub>" (6mm)
- Screw terminals
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- · Spacer and screws included
- · Lifetime limited warranty












1/4"
Plunger
Travel

## Specifications:

Loop type	Closed loop
Electrical configuration	N.O. (SPST)
Switch type	Plunger
Switch travel	½" (6mm)
Connectors	Screw terminals
Color	White
Material	High-impact ABS plastic
Contacts	Iridium-plated
Contact rating	0.1A@100VDC (max.)
	1.0A@10VDC (max.)
	10W (max.)
Operating temperature	-15°~160° F (-25°~70° C)
Switch cycles	50 Million (0.1mA@5VDC)
Dimensions	1 <sup>3</sup> / <sub>4</sub> "x1"x1 <sup>7</sup> / <sub>16</sub> " (44x25x37 mm)
Magnet	Rare-earth neodymium

#### **Dimensions:**

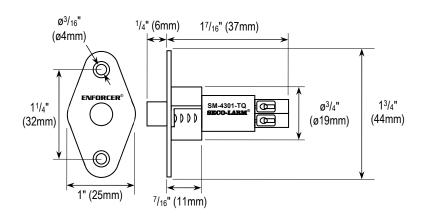

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

