

ENFORCER®

SD-7286-GWQ

Flush-Mount Request-to-Exit Plate

Manual



ENFORCER Flush-Mount Request-to-Exit Plate

Features:

- Large green 2" diameter pushbutton
- Flush mount, protrudes only $\frac{9}{16}$ " (15mm)
- Aluminum back plate fits to single-gang box
- ABS plastic front cover snaps to back plate
- DPDT Momentary switch, 5A@125VAC contact rating


Parts List:

- 1x Front cover
- 1x Back plate
- 2x Mounting screws

Specifications:


Model	SD-7286-GWQ
Contact rating	5A@125VAC (3A@12VDC)
Switch type	DPDT Switch (momentary)
Dimensions	$4\frac{1}{2}$ "x $2\frac{3}{4}$ "x $1\frac{9}{16}$ " (114x69.5x39 mm)

Overview:

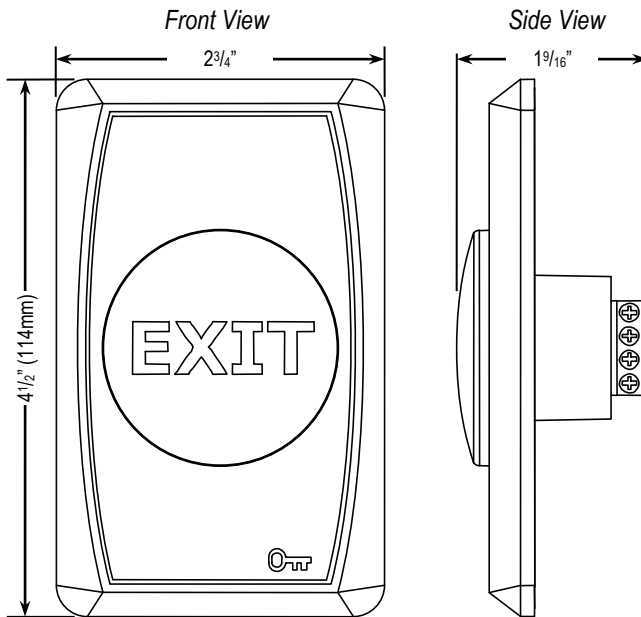


Installation:

1. Remove the back plate from the unit.
2. Thread the cable wire through the electrical box and the center hole of the back plate.
3. Fasten the back plate to the electrical box using the included mounting screws.
4. Connect the wires to the switch using the wiring diagram below.
5. Finish assembly by snapping the front cover onto the back plate.

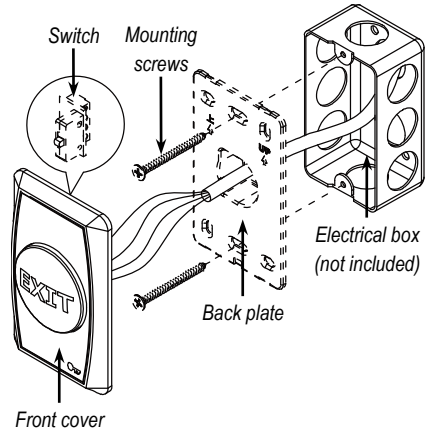


Wiring Diagram:

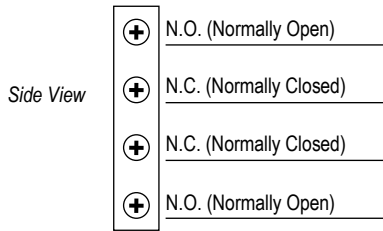

Sample Application:

1. Normally closed (N.C.) on the **SD-7286-GWQ** is connected to a keypad such as the **SD-1123-SQ**. The other N.C. terminal is connected to power.
2. An electromagnetic lock, such as the **E-941SA-600Q**, is connected to normally closed (N.C.) on the keypad's relay.
3. Pressing the button on the **SD-7286-GWQ** will open the electromagnetic lock.

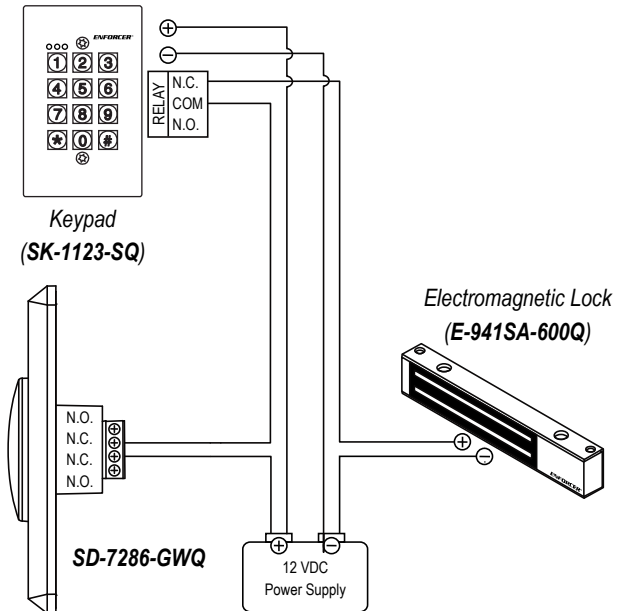

ENFORCER Flush-Mount Request-to-Exit Plate

Also Available from SECO-LARM:

Single-Gang Mortise Cylinder Key Switch
SD-72081-6MQ



Indoor No-Touch Sensor
SD-927PKC-NEQ



Outdoor No-Touch Sensor with
Manual Override
SD-9263-KSVQ



Mushroom Request-to-Exit Plate
SD-7201GC-PEQ



Illuminated Request-to-Exit Plate
SD-7202GC-PEQ



Piezoelectric Request-to-Exit Plate
SD-6276-SS1Q



For a complete listing of SECO-LARM products, please visit us online at www.seco-larm.com.

IMPORTANT: Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes related to locking and egress devices. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

NOTICE: The information and specifications printed in this manual are current at the time of publication. However, the SECO-LARM policy is one of continual development and improvement. For this reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints or typographical errors. Copyright © 2014 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com

Email: sales@seco-larm.com

 PITGW1

MISD-7286-GWQ_1405.docx