

Composite-to-HDMI Converter with Scaler

MVA-TH01Q

The MVA-TH01Q Composite-to-HDMI Converter with Scaler allows the user to convert video from analog devices with composite (RCA) outputs on HDMI displays. Active operation allows the conversion of formats as large as 1920x1080. The MVA-TH01Q also has a L/R analog stereo input allowing the conversion of audio as well.)



Features


- Converts composite video and stereo audio to 720p or 1080p HDMI
- Supports NTSC, PAL, and SECAM video inputs
- Supports up to 1080p on HDMI output
- Stereo audio input
- Selectable between 720p and 1080p upscaling
- Plug and play operation



Specifications

Video formats supported	NTSC / PAL / SECAM
Video input signal	1Vp-p
Audio formats supported	Stereo
Output amplifier bandwidth	1.65Gbps
Output video resolutions	720p/1080p
Output vertical frequency	60Hz
Output DDC signal	5V
Input video connector	RCA Female
Input audio connector	RCA Female
Output video connector	HDMI Type-A 19-pin female
Power supply	5VDC (USB)
Operating temperature	32°~104° F (0°~40° C)
Operating humidity	20~90% RH no condensation
Dimensions	2 ³ / ₈ "x2 ¹ / ₈ "x1 ³ / ₁₆ " (60x54x20 mm)
Weight	1.4-oz (40g)

Overview

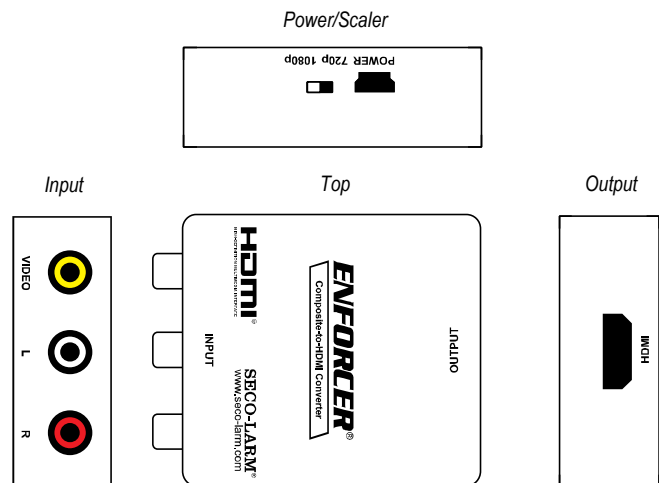

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2022 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_MVA-TH01Q_211129.docx