

# Rack-Mount DC CCTV Power Supply

PH-U1612-PULQ 16 Outputs

**ENFORCER®** Rack-Mount DC CCTV Power Supply fits into standard 19" IT racks to integrate smoothly into an existing rack-mount setup. The unit provides flexible power, mounting, and cable-management options to best suit a company's CCTV power needs in an attractive, compact package.



CCTV

SECURITY

## Features:

- 12 Amps at 12VDC
- 12.6~13.5 VDC field adjustable output
- Compact 1U height fits into standard 19" equipment racks
- Dual-color LED status indicator for each output:
  - Blue: Normal
  - Red: Fuse tripped
- 3 Amps per output
- Outputs protected by PTC fuses rated at 3A each
- Flexible cable management options:
  - 2 Cable-management brackets with 3 different mounting points
  - 2 Cable-management hooks with 3 different mounting points
- Rack-mount options:
  - Facing forward easy access to indicator LEDs
  - Facing backward easy access to connections
- Removable screw terminal blocks for convenient installation and reliable connections

## **Specifications:**


Fuse type	PTC*
Input voltage	100~240 VAC
Number of outputs	16
Total supply current	12A@12VDC max.
Max. current per output	3Amp
Adjustable voltage output	12.6~13.5 VDC
Rack-mount height	1U
Dimensions	1 <sup>3</sup> / <sub>4</sub> "x17 <sup>1</sup> / <sub>2</sub> "x11 <sup>13</sup> / <sub>32</sub> " (45x445x289 mm)
Weight	7-lb 14-oz (3.56kg)

\*Positive temperature coefficient


#### SECO-LARM<sup>®</sup> U.S.A., Inc. 16842 Millikan Avenue, Irvine, CA, 92606

16842 Millikan Avenue, Irvine, CÁ, 92606 **Phone:** (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

## Cable management:

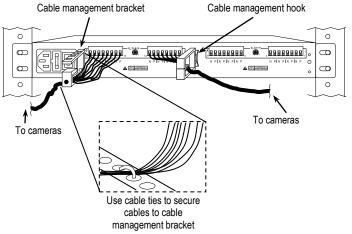

## **Sample Application:**



Reffs

### SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints. SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI

Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the pr

PI\_PH-U1612-PULQ\_170726.docx