

Rack-Mount 12VDC CCTV Power Supply

PH-U1820-PULQ 18 Outputs, 20 Amps



The ENFORCER Rack-Mount DC CCTV Power Supply includes an LCD display of output current and voltage and fits into standard 19" IT racks to integrate smoothly into an existing rack-mount setup. The unit provides flexible power and mounting options to best suit a company's CCTV power needs in an attractive, compact package.



Features:


- 18 Outputs, 20A total
- PTC fuse protected outputs, 16 outputs at 1.6A and 2 outputs at 5A
- 11.7~13.6 VDC field-adjustable output
- 110/220 VAC Input with selection switch
- LCD Display of output voltage and total output current
- LED Status indicators for each output
- Removable screw terminal blocks for convenient installation and reliable connections
- For rack mounting or stacking on a shelf
- Compact 1U size fits standard 19" racks
- Attractive, high-tech industrial design



Specifications:

Input voltage	110/220 VAC (with selection switch)	
Input fuse	Glass, 10A	
Number of outputs	18	
Maximum current per output	Ch. 1~2	5A
	Ch. 3~18	1.6A
Output fuse type	PTC	
Output voltage	Adjustable, 11.7~13.6 VDC	
Rack-mount height	1U	
Operating humidity	Up to 90%, non-condensing	
Operating temperature	-14°~86° F (-26°~30° C)	
Dimensions	1 ³ / ₄ "x17 ¹ / ₂ "x7 ⁷ / ₈ " (45x445x200mm)	
Weight	5-lb 7-oz (2.47kg)	

Sample Application:

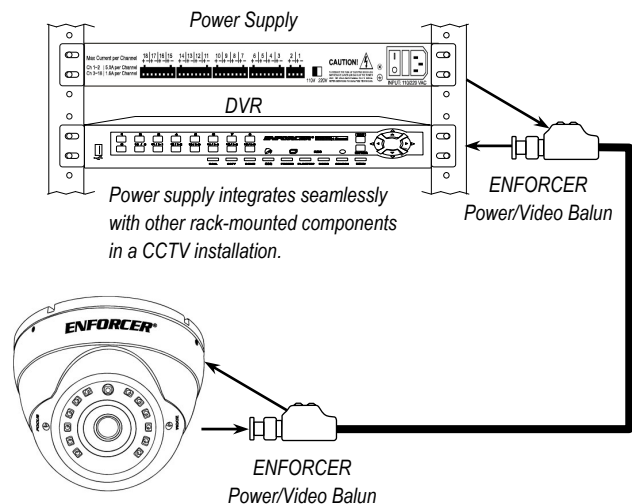

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2019 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_PH-U1820-PULQ_190729.docx