

DIP-Switch Coded Transmitter

SK-919T1-GBDQ 1 Button, 1 Channel

The ENFORCER DIP-Switch Coded Transmitter uses a DIP-Switch to set the code. Suitable for applications requiring large numbers of transmitters with identical codes. A secured site might want all engineers on a project to have access to the same buildings, while another working group might need access to a different set. Similarly, a gated community might want to have one code for all residents, with the ability to change the code if transmitters are lost or stolen.



Features

- Use for "block coding" (multiple transmitters programmed to the same code)
- Frequency 315MHz*
- Operates up to 500ft (150m)†
- LED Transmission and low battery indicator
- Includes 3VDC lithium battery (CR-2032)
- Compatible with all 315MHz SK-series receivers
- Coding by 8-pin DIP switch providing 256 combinations
- Easily pocketable pendant with golden key ring
- FCC ID: K4E919T2GDW

Up to
500ft†

DIP
Switch
Coding

Lithium
Battery


LED
Indicator

Specifications

Type	1-Channel RF Transmitter
RF Frequency	315MHz*
Number of buttons	1
Channels	1
Code combinations	256 possible codes with 8-pin DIP switch
Dimensions	1 1/4" x 2 3/16" x 5/16" (31.5x55x8 mm)

Coding and Battery Access

1. Open the case using a coin inserted in the notch next to the key ring.
2. All DIP switches are factory preset to ON (up).
3. To set your code, move any combination of the DIP switches to OFF using a small tool and note your choices.
4. Program your receiver to learn the code.

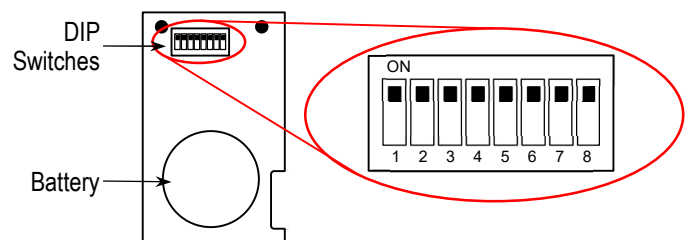

*433.92MHz C€ version also available – SK-939T1-GBDQ

†Actual range will vary greatly depending on the installation and operating environment.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SK-919T1-GBDQ_210216.docx