

Passive VGA Balun

MVE-SV010Q

Range: Up to 443ft (135m)


Up to
1280 x 1024
Resolution
Up to 197ft (60m)

Features:


- Transmits VGA signals from personal computers, digital video recorders, video splitters, or similar video sources with a VGA output to CRT or LCD monitors or VGA projectors
 - Works with video signals of up to 1280x1024 pixel resolution
 - Uses Cat5e/6 cable* instead of heavier, more expensive VGA cables
 - Sold in pairs: One for the video source, one for the monitor
 - Small size, only 2 1/2" x 2 5/8" x 1" (64 x 67 x 27mm)
- *Works with UTP and STP. Use STP for best results.

Specifications:

VGA Connectors	Female, 15-pin	
Number of inputs	1	
Number of outputs	1	
Range	640x480 pixels (15MHz)	443ft (135m)
	800x600 pixels (30MHz)	344ft (105m)
	1024x768 pixels (60MHz)	246ft (75m)
	1280x1024 pixels (100MHz)	197ft (60m)
Operating temperature	32°~131° F (0°~55° C)	
Operating humidity	Up to 95%	
Storage temperature	-4°~185° F (-20°~85° C)	
Dimensions	2 1/2" x 2 5/8" x 1" (64x67x27 mm)	
Weight (single unit)	5-oz (142g)	
Box	Weight	0.94-lbs (426g)
	Dimensions	4 1/2" x 4 7/16" x 3 7/8" (115x110x85 mm)
Carton	Quantity	40 pieces
	Weight	39.7-lbs (18kg)
	Dimensions	21" x 10 1/2" x 9 1/2" (53x27x24 cm)

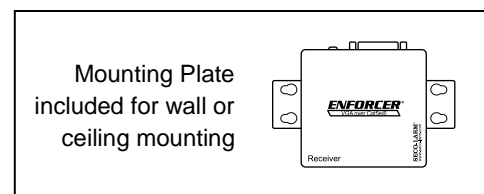

Dimensions:

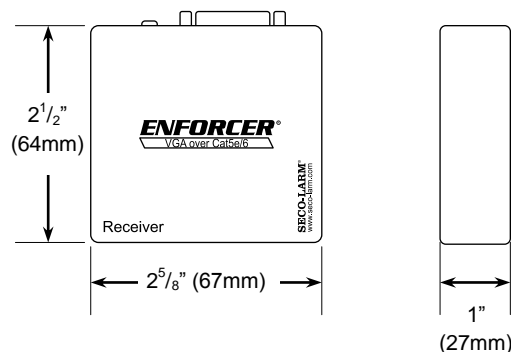

Related Products:



Wireless HDMI Extender



Component Video Balun over Cat5e/6



Active VGA and Audio Distributor over Cat5e/6



HDMI Extender over Cat5e/6

SECO-LARM

16842 Millikan Ave • Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2012 © SECO-LARM U.S.A, Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM CRIMEBUSTER® CBA SLI

PIMVE-SV010Q.docx